


PEKA-Fix 0611

Art.-Nr.: 36..23

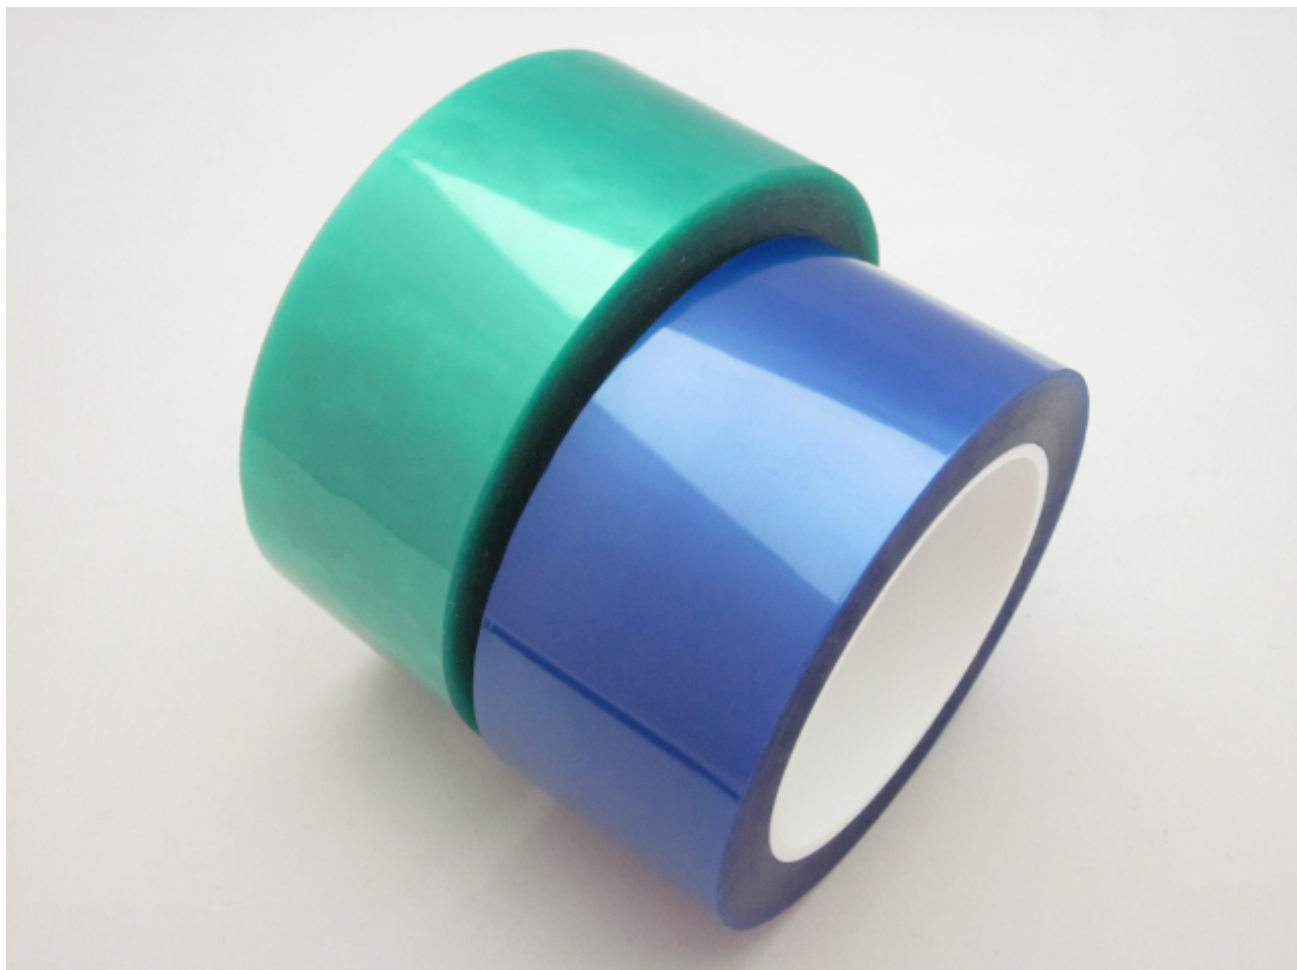

Description:

50 micron polyester film coated on one side with a high quality silicone adhesive system. Designed for masking in high temperature applications where a strong backing combined with excellent chemical resistant adhesive are required.

- High temperature resistance (180 °C - 200 °C)
- Clean removal (in one-piece) from a variety of substrates
- Good adhesion and chemical resistance

Area of use:

- Powder coating industry
- Composites industry
- Splicing of siliconized substrates

PEKA Stanz- und Klebetechnik GmbH & Co. KG · Am Forst 30 · D-74889 Sinsheim
Tel.: +49 (0) 72 65 91 30-0 · FAX: +49 (0) 72 65 91 30-35 · www.peka-stanztechnik.de · info@peka-stanztechnik.de

The specifications have been determined by standard test methods and are average values. Due to the variety of uses of the PEKA products and the continuing development of new applications, the purchaser should carefully consider the suitability and performance of the product for each intended use, and the purchaser shall assume all risks regarding such use. All specifications are subject to change without prior notice.

PEKA-Fix 0611

Art.-Nr.: 36..23

Technical Data:

Category	Splicing tapes
Carrier	PET film
Colours	Green (Blue, black and transparent upon request)
Thickness	0,085 mm
Adhesive	Silicone
Temperature resistance 1h	130 °C (Short time temperature resistance 200 °C)
Tensile strength	70 N/cm
Shelf life	12 months Suggested storage temperature is between 10 °C and 30 °C with 50 % relative humidity.
Voltage Resistance	7,0 kV
Ball tack	< 10 cm
Elongation at break	100 %
Peel adhesion at 180° on steel	2,80 N/cm