
Technical Datasheet 08-02-2019

PEKA-Film 1107

Art.-Nr.: 110759

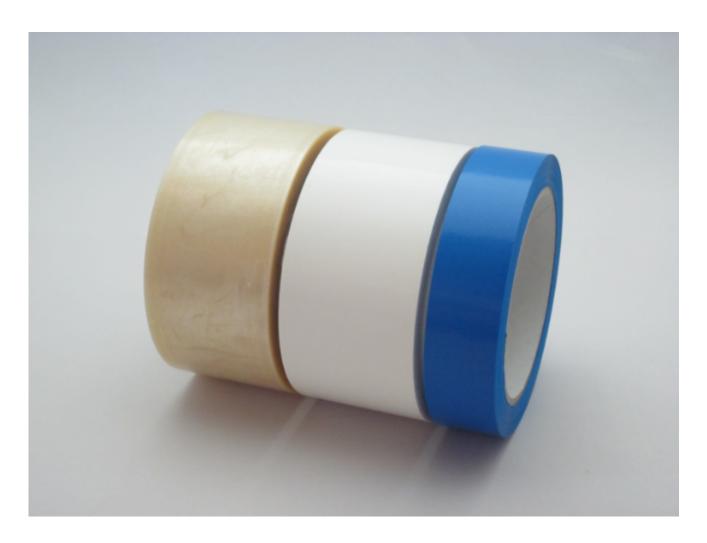

Easy unwind - rigid PVC-film, single side coated with a low tack rubber adhesive. **Description:**

Area of use: Protection of sensitive surfaces against dirt and damage during processing, storage, repair and transport.

Especially suitable for:

- Aluminium and stainless steel brushed/varnished
- Metal
- Glass
- Plastic



Technical Datasheet 08-02-2019



PEKA-Film 1107

Art.-Nr.: 110759

Technical Data:

Category	Single-sided adhesive tapes with protective film
Carrier	Rigid PVC-film
Colours	White, blue and transparent
Thickness	Trägerdicke: 0,035 mm Gesamtdicke: 0,05 mm
Adhesive	Natural rubber
Temperature resistance 1h	-25 °C up to 65 °C
Application temperature	> 10 °C up to 45 °C
Elongation at tear	60 %
Shelf life	12 months at 18 $^{\circ}$ / 55 $^{\circ}$ RF (Dry 5 $^{\circ}$ C up to 25 $^{\circ}$ C, UV-protected)
UV Resistance	Limited
Weather Resistance	Limited
Tensile strength	> 75 N/25 mm
Peel adhesion	0,5 - 2,0 N/25 mm

