


## PEKA 42 PP-Film metallisiert

Art.-Nr.: 425557

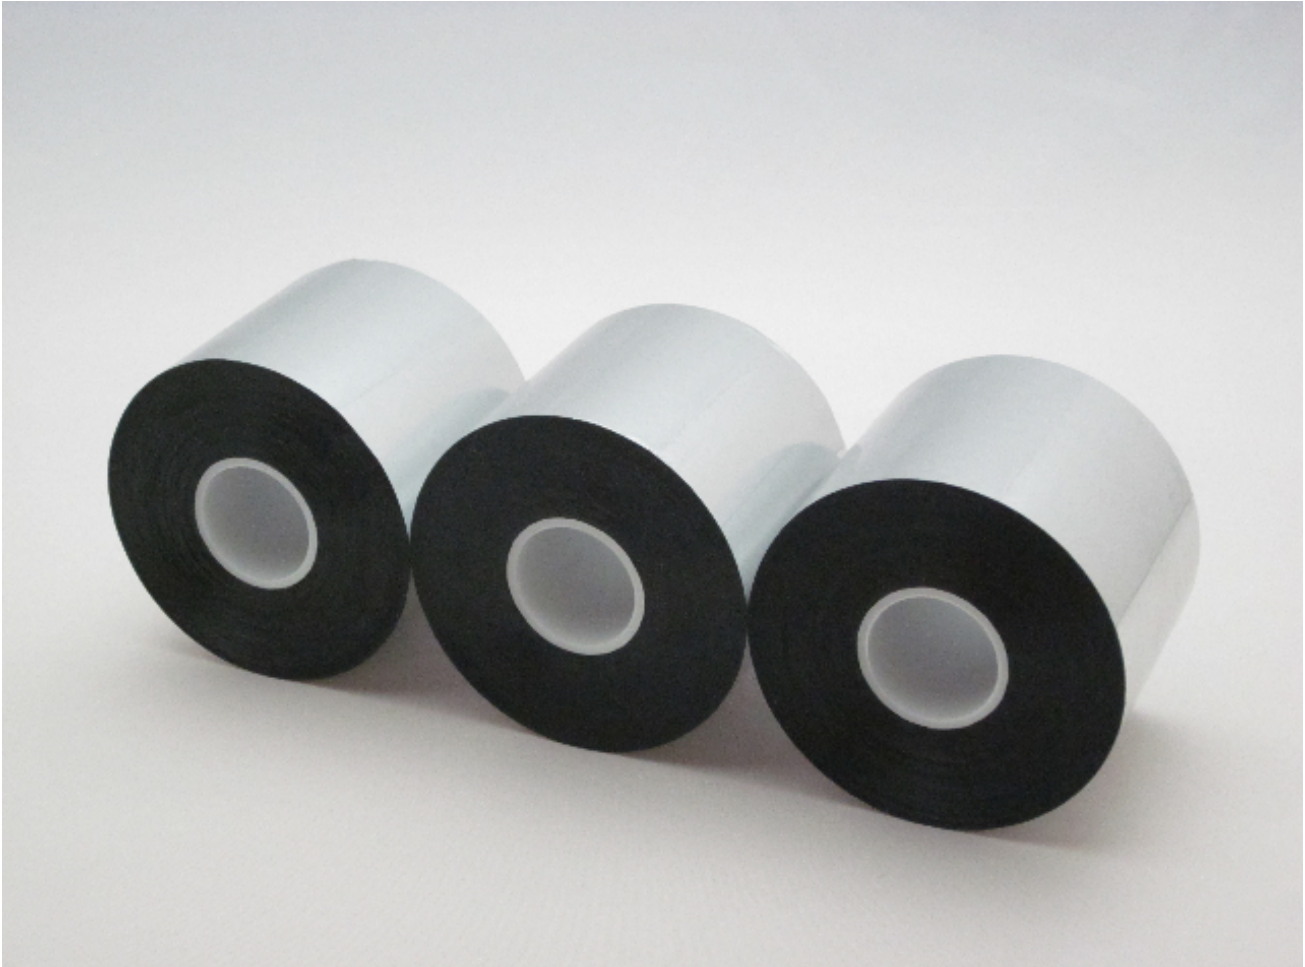

### Description:

A utility grate Flexible Duct Closure Tape, 25 my (1.0 mil) metallized PP film with water based acrylic adhesive system. Also available on 1 inch core.

- Good Tack
- Flexible & Durable
- Perform Well in Both Warm & Cold Weather
- Conform Well to Irregular Surface

### Area of use:

Primarily used for connect, join, seal and patch flexible air ducts and air connectors, can also be used in metal and metal connections.

### Remark:

Surface preparation: It is essential, as with all pressure-sensitive tapes, that the surface to which the tape is applied must be clean, dry, free of grease, oil or other contaminants.

PEKA Stanz- und Klebtechnik GmbH & Co. KG · Am Forst 30 · D-74889 Sinsheim  
Tel.: +49 (0) 72 65 91 30-0 · FAX: +49 (0) 72 65 91 30-35 · [www.peka-stanztechnik.de](http://www.peka-stanztechnik.de) · [info@peka-stanztechnik.de](mailto:info@peka-stanztechnik.de)

The specifications have been determined by standard test methods and are average values. Due to the variety of uses of the PEKA products and the continuing development of new applications, the purchaser should carefully consider the suitability and performance of the product for each intended use, and the purchaser shall assume all risks regarding such use. All specifications are subject to change without prior notice.

## PEKA 42 PP-Film metallisiert

Art.-Nr.: 425557

### Technical Data:

<b>Category</b>	Single-sided adhesive aluminum and metallized tapes
<b>Carrier</b>	Metallized PP film
<b>Colours</b>	Aluminium
<b>Thickness</b>	0,065 mm
<b>Adhesive</b>	Water based acrylic adhesive system
<b>Adhesive power on steel N/25 mm</b>	12 N/25 mm
<b>Temperature resistance 1h</b>	-30 °C to 100 °C
<b>Application temperature</b>	10 °C to 40 °C
<b>Tensile strength</b>	75 N/25 mm
<b>Shelf life</b>	12 months when stored at 21 °C (70 °F) / 50 % relative humidity out of direct sunlight.
<b>Elongation</b>	100 %
<b>Tack Rolling Ball</b>	5 cm