


## PEKA-Mount 7420

Art.-Nr.: 722824

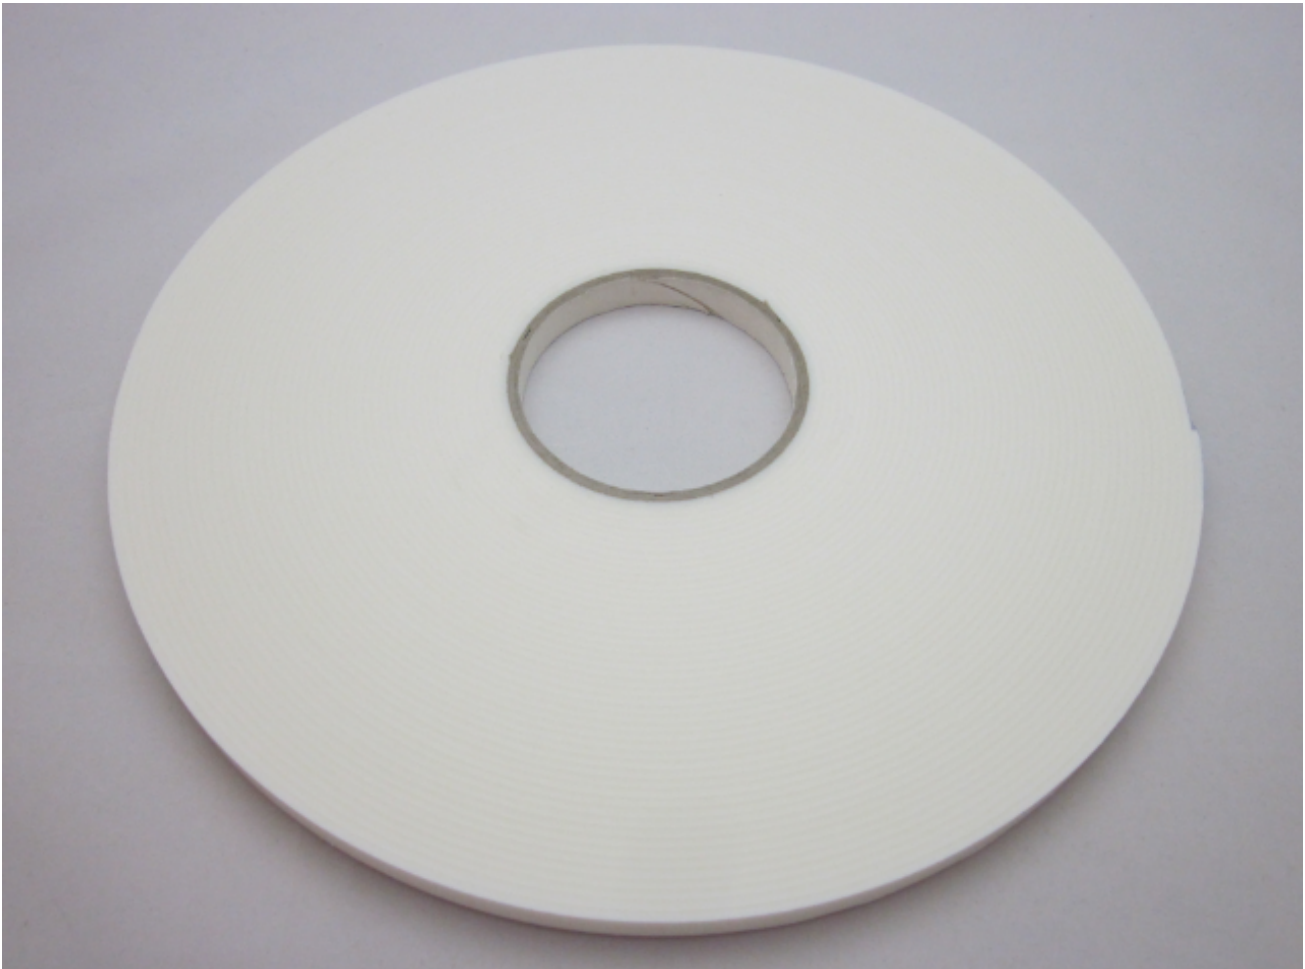

### Description:

The double sided adhesive tape with foam carrier consists of a closed-cell and radiation crosslinked polyethylene foam. This is coated on both sides with a synthetic rubber pressure sensitive adhesive. The foam tape is covered with a white silicone paper. The adhesive is characterized by very high shear force values.

### Area of use:

PEKA-Mount 7420 is ideally suited for the bonding of plastic profiles in the construction industry (Window construction) can be used. The pressure sensitive adhesive bonded even at low outside temperatures.

### Remark:

Shear strength on steel at 23 °C:  
500 g/12,5 x 12,5 mm | > 10000 min (to AFERA 4012)

## PEKA-Mount 7420

Art.-Nr.: 722824

### Technical Data:

<b>Category</b>	Double-sided adhesive foam tapes
<b>Carrier</b>	Polyethylene foam, closed-cell, irradiated
<b>Density</b>	50 kg/m <sup>3</sup>
<b>Thickness</b>	2,00 mm
<b>Adhesive</b>	Synthetic rubber
<b>Liner</b>	Silicone paper, 80 g/m <sup>2</sup> , white
<b>Temperature resistance 1h</b>	-20 °C to 70 °C (short term up to 90 °C)
<b>Peel strength</b>	32 N/25 mm nach 10 min   36 N/25 mm nach 24 h (to AFERA 4001)
<b>Loop Tack</b>	49 N/25 mm (to AFERA 4015)