


PEKA-Mount 7112

Art.-Nr.: 726889

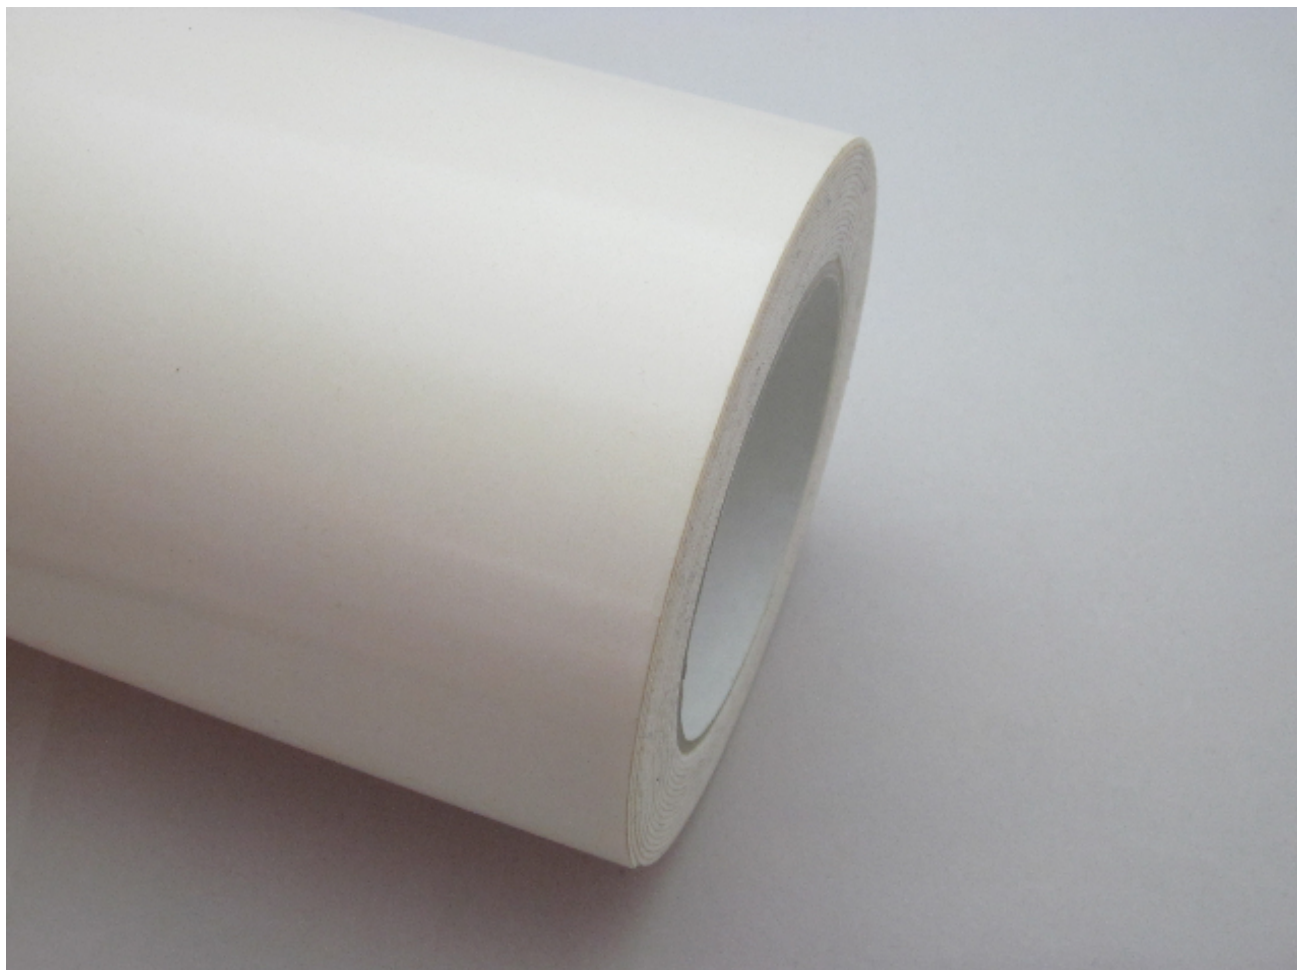

Description:

This tape consists of a white, closed-cell polyethylene foam coated on both sides with a modified solvent acrylate adhesive. The modified solvent acrylate adhesive possesses a high initial adhesion, even on rough and difficult substrates.

Area of use:

For the installation of spray cast and extruded plastic parts such as panels, bars and ducts, as well as plexiglass mirrors for interior fit-outs and displays. For use as an adhesive medium for hooks, signs, handles and dispensers. Ideal for use in exhibition and conference fit-outs. Due to good UV, water and age resistance this product is also suitable for external applications.

PEKA-Mount 7112

Art.-Nr.: 726889

Technical Data:

Category	Double-sided adhesive foam tapes
Carrier	Closed-cell polyethylene foam, white, 1000 micron
Density	55 kg/m ³
Thickness	1,10 mm
Adhesive	Modified solvent acrylate
Liner	White paper, both sides coated with silicone, 90 g/m ²
Adhesive power (FINAT TM 1, on stainless steel)	after 1 min 18 N/25 mm after 20 min > 18 N/25 mm, foam tear after 24 h > 18 N/25 mm, foam tear
Shear strength (FINAT TM 8, on stainless steel)	> 300 h at 23 °C > 6 h at 70 °C
LoopTack (FINAT TM 9)	30 N/25 mm
Temperature resistance 1h	-40 °C to 100 °C
Temperature resistance (S.A.F.T.)	75 °C
Application temperature	> 15 °C
Shelf life	2 years in original packaging, at 20 °C and 50 % relative humidity