


## PEKA-Mount 7190

Art.-Nr.: 749489

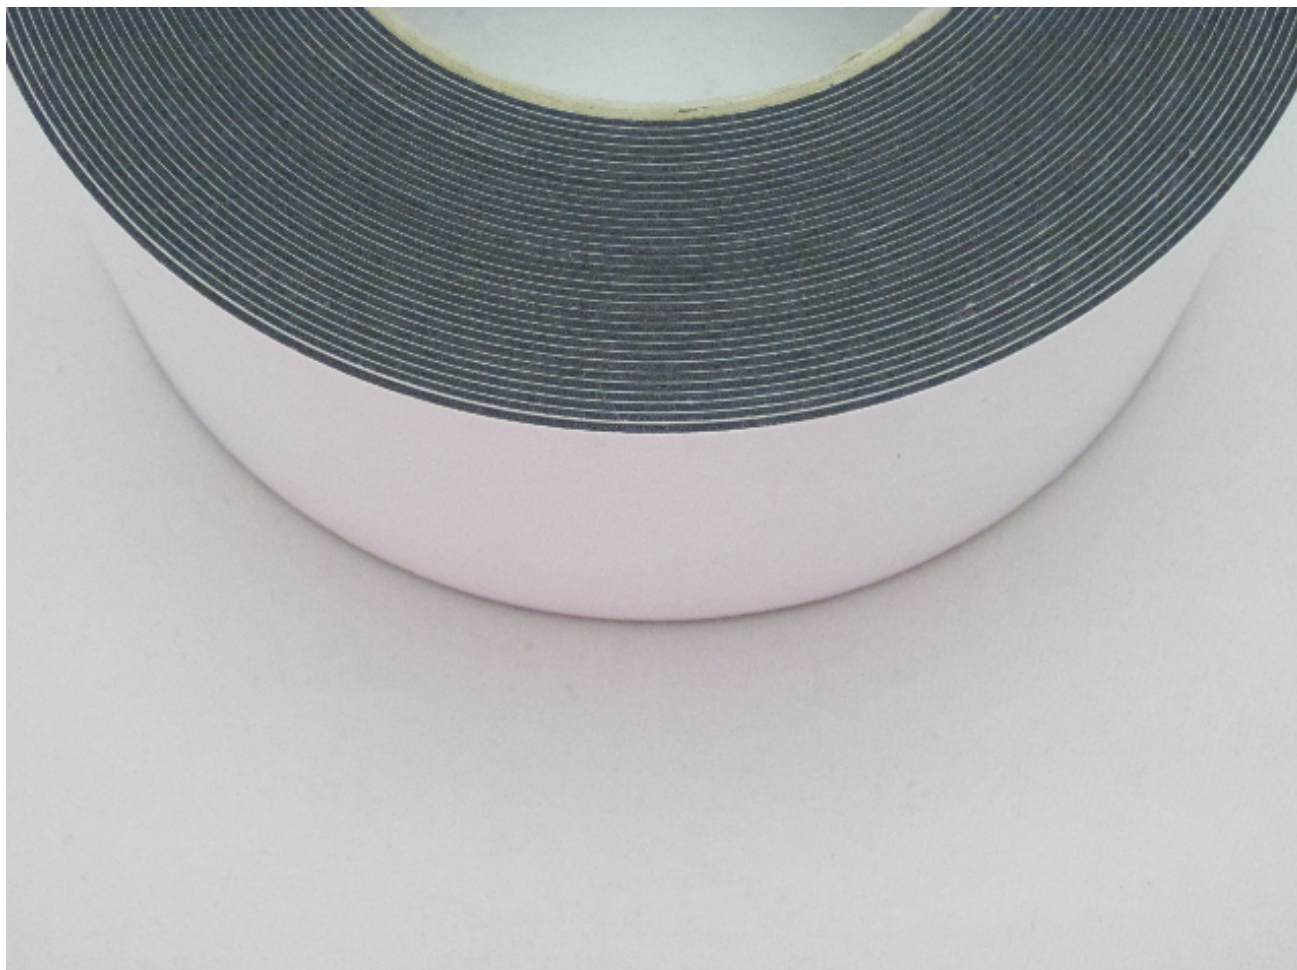

### Description:

This tape consists of a black, closed-cell polyethylene foam coated on both sides with a solvent pure acrylate adhesive. This adhesive is lined with a white, water resistant paper coated on both sides with silicone and polyethylene. The solvent pure acrylate adhesive guarantees a high final strength and is resistant to extreme temperatures, acids, leaches and solvents.

### Area of use:

Durable fixing of trims, panels, letters and emblems in the automobile industry.

## PEKA-Mount 7190

Art.-Nr.: 749489

### Technical Data:

<b>Category</b>	Double-sided adhesive foam tapes
<b>Carrier</b>	Closed-cell polyethylene foam, black, 800 micron
<b>Density</b>	185 kg/m <sup>3</sup>
<b>Thickness</b>	0,90 mm
<b>Adhesive</b>	Solvent pure acrylate
<b>Liner</b>	White paper, 140 g/m <sup>2</sup> , both sides coated with silicone and polyethylene
<b>Adhesive power (FINAT TM 1, on stainless steel)</b>	after 1 min 16 N/25 mm   after 20 min 17 N/25 mm   after 24 h 20 N/25 mm
<b>Shear strength (FINAT TM 8, on stainless steel)</b>	> 1000 h at 23 °C   > 72 h at 70 °C
<b>LoopTack (FINAT TM 9)</b>	28 N/25 mm
<b>Temperature resistance 1h</b>	-40 °C to 95 °C
<b>Temperature resistance (S.A.F.T.)</b>	85 °C
<b>Application temperature</b>	> 18 °C
<b>Shelf life</b>	2 years in original packaging, at 20 °C and 50 % relative humidity