


PEKA-Mount 7190 K3

Art.-Nr.: 749489

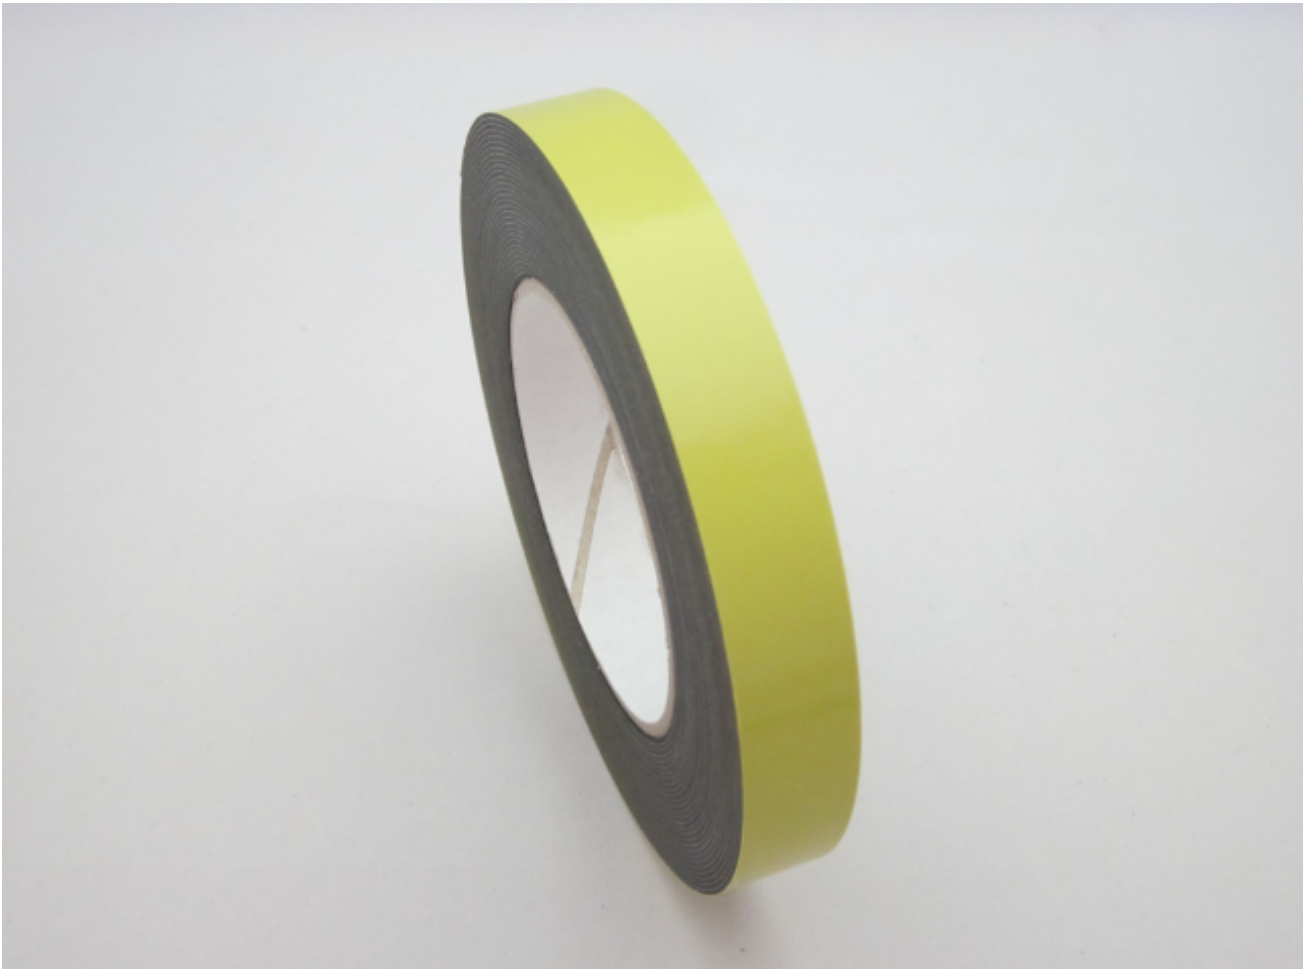

Description:

This tape consists of a black, closed-cell polyethylene foam coated on both sides with a solvent pure acrylate adhesive. This adhesive is lined with a white, water resistant paper coated on both sides with silicone and polyethylene. The solvent pure acrylate adhesive guarantees a high final strength and is resistant to extreme temperatures, acids, leaches and solvents.

Area of use:

Durable fixing of trims, panels, letters and emblems in the automobile industry.

PEKA-Mount 7190 K3

Art.-Nr.: 749489

Technical Data:

Category	Double-sided adhesive foam tapes
Carrier	Closed-cell polyethylene foam, black, 800 micron
Density	180 kg/m ³
Thickness	0,90 mm
Adhesive	Solvent pure acrylate
Liner	PP-film, yellow, 100 micron, both sides coated with silicone
Adhesive power (FINAT TM 1, on stainless steel)	after 1 min 16 N/25 mm after 20 min 17 N/25 mm after 24 h 20 N/25 mm
Shear strength (FINAT TM 8, on stainless steel)	> 1000 h at 23 °C > 72 h at 70 °C
LoopTack (FINAT TM 9)	28 N/25 mm
Temperature resistance 1h	-40 °C to 95 °C
Temperature resistance (S.A.F.T.)	85 °C
Application temperature	> 18 °C
Shelf life	2 years in original packaging, at 20 °C and 50 % relative humidity