


## Orabond 1831

Art.-Nr.: 183189

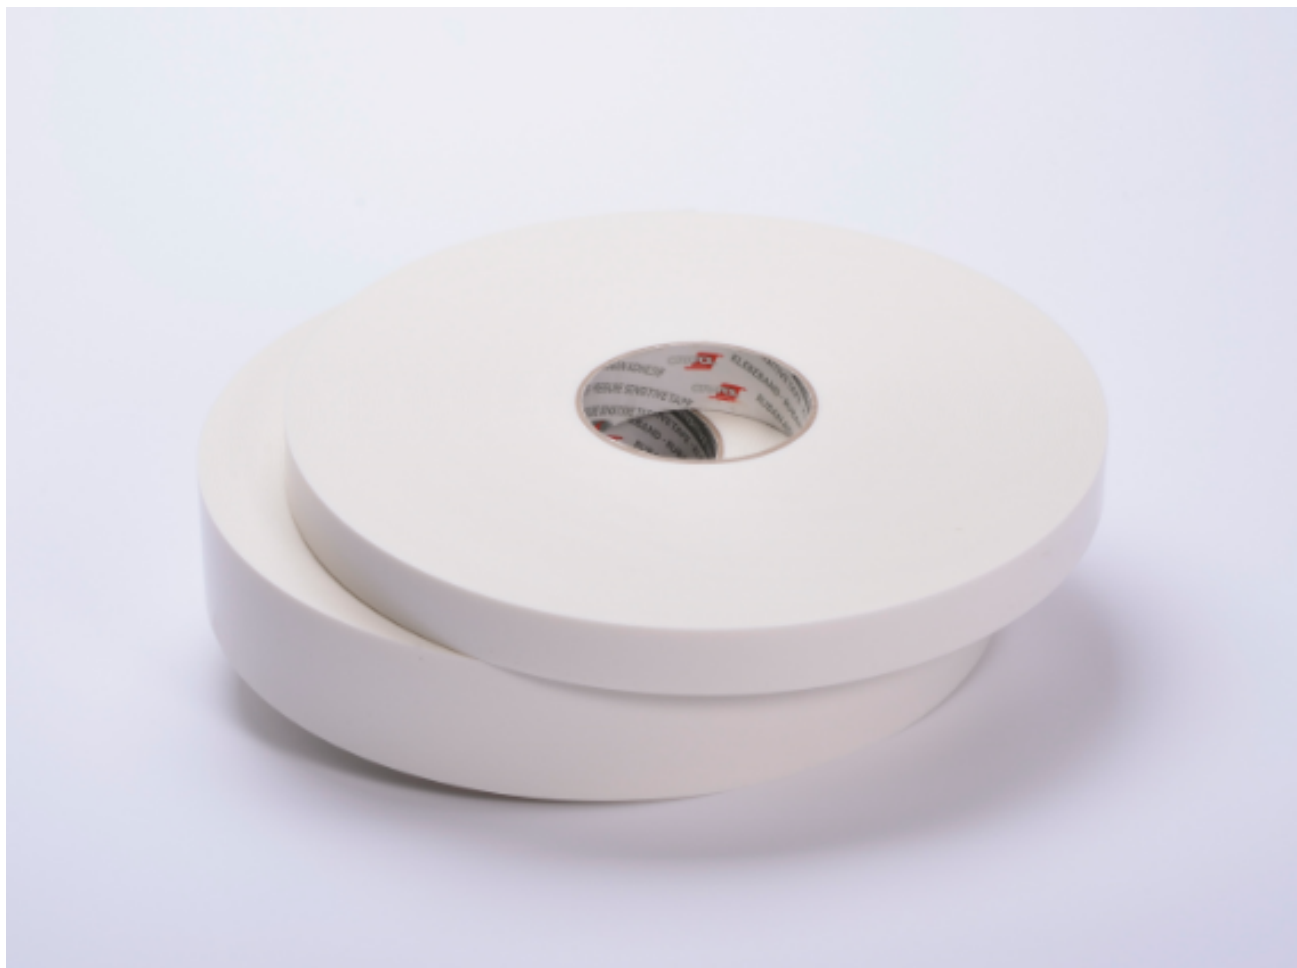

### Description:

This mounting tape consists of a white, closed-cell polyethylene foam coated on both sides with a rubber adhesive. The rubber adhesive adheres well among other things on apolar substrates. The double-sided mounting tape is lined with a white silicone paper.

### Area of use:

For fixing of boards, displays and for a variety of household applications. A universal, economical product. Good adhesion also on rough surfaces.

## Orabond 1831

Art.-Nr.: 183189

### Technical Data:

<b>Category</b>	Double-sided adhesive foam tapes
<b>Carrier</b>	Closed-cell polyethylene foam, white, 1000 micron
<b>Density</b>	58 kg/m <sup>3</sup>
<b>Thickness</b>	1,10 mm
<b>Adhesive</b>	Rubber
<b>Liner</b>	White paper, both sides coated with silicone, 90 g/m <sup>2</sup>
<b>Adhesive power (FINAT TM 1, on stainless steel)</b>	after 1 min 18 N/25 mm   after 20 min > 18 N/25 mm   after 24 h > 18 N/25 mm
<b>Shear strength (FINAT TM 8, on stainless steel)</b>	> 500 h at 23 °C   1 h at 70 °C
<b>LoopTack (FINAT TM 9)</b>	35 N/25 mm
<b>Temperature resistance 1h</b>	-30 °C to 70 °C
<b>Temperature resistance (S.A.F.T.)</b>	75 °C
<b>Application temperature</b>	> 15 °C
<b>Shelf life</b>	1 year in original packaging, at 20 °C and 50 % relative humidity